

ELIPSE INTEGRA® HALF-FACE MASK + HESPA™ P3 DUST (R) Filters

TDS Technical DataSheet



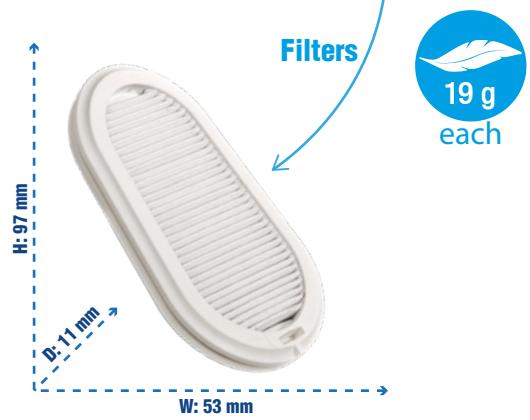

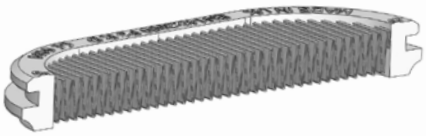

Encapsulation (patented technology)
645 mm; lenght of actual media in each filter



Standards
EN140: 1998 Mask Body
EN143: 2000+A1: 2006 P3 RD
EN166 Class 2.F. K.N. (Anti-Fog & Anti-Scratch)
CE 2797 - UKCA 0086

Efficiency
P3 >99,95% for 0,3 µ particulate

Weight
Mask + Filter: net (S/M) 205 g; (M/L) 213 g
gross (S/M) 317 g; (M/L) 347 g
Filter: net 19 g each; both net 38 g, gross 61 g

Shelf Live
5 years (mask & filters) See storage conditions on Instructions for Use.
Filters are re-usable and changeable.

Material
- **Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- **Filters:** Mechanical type multi-layer HESPA Synthetic media with TPE flexible overmolded / encapsulated.
- **Goggle:** Polycarbonate with flow coating overmolded into soft TPE, permanently attached to the mask body by stainless steel clips.

Production
United Kingdom, Italy, Romania
100% of filters NaCl Tested

	Code	Description	Quantity
	SPR407(S/M) SPR406 (M/L)	P3 Elipse Integra complete with P3 filters	5 pcs. per box
	SPR316	Elipse P3 replacement filters	10 sets of 2 pcs. per box
	SPM007	Integra case	5 pcs. per box
	SPM520	Peel off visor x 10	10 sets per box
	SPM414	Portacount Face Fit Kit adaptor	50 sets of 10 pcs. per box

Applications - dust, mist and fumes

Grinding
Metal Fumes and Dust

Construction
Silica Dust, Abestos, Concrete Dust, Stone Dust, Aggregate Dust, Wood Dust, Cement Dust, Mold

Mining
Coal Dust, Silica Dust

Manufacturing
Glass Fibres, Composite Fibres, Lead Fumes

Food
Poultry, Powders (Dairy), Spices, Grain Dust

Pharmaceutical
Powders, Viruses