ELIPSE® HALF-FACE MASK +HESPA™ A1 (R) Filters


TDS Technical DataSheet






Filters

92 g each

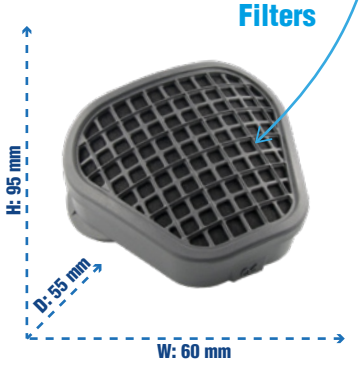

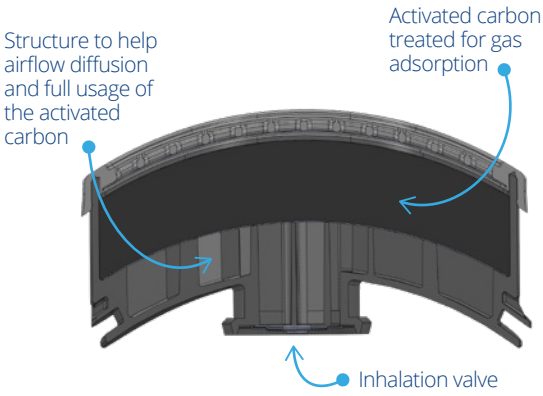

Standards
EN140: 1998 Mask Body
EN14387: 2004 + A1: 2008 A1
CE 2797 - UKCA 0086

Efficiency
At 1000 ppm:
Cyclohexane (C_6H_{12}) > 70 minutes

Weight
Mask + Filter: net (S/M) 290 g; (M/L) 297 g
gross (S/M) 376 g; (M/L) 378 g
Filter: net 95 g each; both net 184 g, gross 206 g

Shelf Live
5 years (mask & filters) See storage conditions on Instructions for Use.
Filters are re-usable and changeable.

Material
- **Mask:** Medical grade TPE Conforms to ISO 10993-10: 2010 for irritations. Mask body latex and silicone free, odour free. Valve Body in Nylon, Inhalation/Exhalation diaphragm in Silicone. 4 point adjustable elasticated head and neck strap with comfort pad in TPE.
- **Filters:** Activated carbon sealed into a ABS Shell.

Production
United Kingdom

	Code	Description	Quantity
	SPR511 (S/M) SPR512 (M/L)	A1 Reusable Half Mask	8 pcs. per box
	SPR513	A1 Replacement filters	5 sets of 2 pcs. per box
	SPM009	Elipse High efficiency Mask Carry Case (Belt holder)	10 sets per box
	SPR523	Cases for P3 filters	15 sets of 2 pcs. per box
	SPM524	Pair of P3 filters	15 sets of 2 pcs. per box

Applications - Universal gases, dust, mist and fumes

Type	Protection
A	organic gases and vapours with a boiling point above 65°C
B	inorganic gases and vapours (excluding carbon monoxide)
E	sulphur dioxide and other acidic gases and vapours
K	ammonia and organic ammonia derivatives

